



700 Series

Hot Water Pressure Washers

#1 in North America for High-Pressure Cleaning Equipment

Electric / Direct or Belt Drive

Stainless-steel coil skin provides extra durability to withstand the elements (790SS & 795SS)

Upright, oil fired burner delivers high efficiency and maintains constant temperature using diesel fuel, kerosene or home-heating oil

Simple, easy-to-use control panel includes adjustable thermostat with precision safety controls

5 HP, 230V, 1PH electric motor (795SS) comes with thermal overload protection and manual reset



Heater coil carries a 5-year warranty



Hotsy-designed Triplex pumps carry a 7-year limited warranty

50-ft. length of high-pressure hose for ease in cleaning around a large area

Convenient hose-reel bracket accepts swivel or stationary reels for ease in hose maneuverability and storage (optional on gas fired models)

Adjustable high pressure detergent injection ensures high-pressure sudsing for better cleaning

Rust-proof, removable, non-contaminating polyethylene fuel tank includes fuel gauge in cap

Pneumatic tires for easy maneuvering

Model 795SS: 3.5 GPM @ 2000 PSI; Oil fired; 230V, 1PH; Belt Drive Pump

37-ft. power cord with safety **Ground Fault Circuit Interrupter (GFCI breaker)**

Model 771 (Propane): 2.8 GPM @ 1500 PSI; 230V, 1PH; Direct Drive Pump. Model 772-Natural Gas (Model left, shown with optional Portagegear Kit & Vapor LP Tank)

FEATURES

- 2.8 to 3.5 GPM @ 1500 to 2000 PSI
- Oil Fired, LP or Natural Gas Fired Burners
- 208V or 230V, 1PH
- Direct or Belt Drive Pumps



700 SERIES Hot-Water ELECTRIC Models

■ Oil Fired, LP or Natural Gas Fired ■ 2.8 to 3.5 GPM @ 1500 to 2000 PSI ■ Hotsy 7-Year Pump Warranty ■ Direct or Belt Drive

Designed for tough, industrial cleaning.

SPECIFICATIONS											BELT or DIRECT DRIVE	
MODEL	GPM	PSI	HP	VOLT/PH	AMP	FUEL	BTU/HR	PUMP	DRIVE	PORTABILITY	DIMENSIONS	SHIP WT (lbs)
771	2.8	1500	3	230/1	13	LP	280,000	Hotsy Triplex	Direct	Optional	32"Lx27"Wx45.5"H	415
772	2.8	1500	3	230/1	13	NG	338,000	Hotsy Triplex	Direct	N/A	32"Lx27"Wx45.5"H	415
790SS	2.8	2000	4TEFC	230/1	20	Oil	289,900	Hotsy Triplex	Belt	Std	37"Lx28"Wx45.5"H	460
795SS	3.5	2000	5	230/1	24	Oil	289,900	Hotsy Triplex	Belt	Std	37"Lx28"Wx45.5"H	500
795SS-208	3.5	2000	5	208/1	27	Oil	289,900	Hotsy Triplex	Belt	Std	37"Lx28"Wx45.5"H	500

SS=Stainless Steel



Clean better with Hotsy detergents

Hotsy pressure washers clean best when matched with our specially-formulated Hotsy detergents. Nearly all 40 Hotsy detergent formulations contain Hotsy's exclusive advanced-formula HCC additives to help prevent scale build-up and fight corrosion in your equipment. Most Hotsy detergents are USDA and Canadian Agriculture approved. All are highly concentrated, so a little goes a long way.

Spend some time with a Hotsy Expert

Hotsy has more than 130 local Sales & Service Distributors in North America, all factory-trained to properly evaluate your high-pressure cleaning needs.

Rely on our network of seasoned service professionals for the safest, most effective and most efficient solution to your specific cleaning need.



OPTIONS for 700 SERIES

- **8" Natural Gas or LP-Gas-Fired Draft Diverters** (Models 771 & 772) prevent backdrafts; keeps cold air out & prevents water from running down vent pipes
- **8" Oil-Fired Draft Dampener** (Models 790SS & 795SS) barometric; prevent backdrafts; keeps cold air out
- **Portagear** (Model 771-Propane) for easy movement around the shop
- **Propane Tank** (Model 771-Propane) Vapor LP Tank
- **Hose Reel Bracket** (Models 771&772) accepts stationary or swivel hose reels

Hotsy Accessories customize your application for top performance




360° Pivot and non-pivot hose reels keep hose neatly stored and shop areas safe



High-pressure turbo nozzles for faster cleaning

Telescoping wands extend to 24' to reach high places without scaffolding

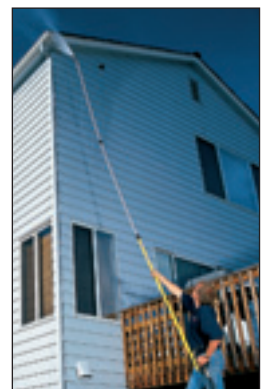

Heavy-duty, high-pressure hoses in lengths up to 150-ft.



Rotary surface cleaner attaches to your pressure washer; reduces overspray and zebra striping

hotsy *Nothing Cleans Like a Hotsy!*

Tel: (800) 525-1976 Fax: (888) 880-9631
 www.Hotsy.com email: info@Hotsy.com
 P/N 8.914-224.0 Effective 1/09 Specifications & product descriptions subject to change without notice. ©2009 Hotsy



Distributed by:

NOTE: We are constantly improving and updating our products. Consequently, pictures, features & specifications in this brochure may differ slightly from current models. Flow rates & pressure ratings may vary due to variances allowed by manufacturers of our machine components. We attempt to keep our machine performance within ± 5% of listed specifications.